

CHAMPION FLEX-O-SEAL

ePTFE JOINT SEALANT TAPE




Product Description

Champion Flex-O-Seal is a unique sealing material manufactured from special grade of 100% expanded pure PTFE by transforming into a fibrous structure. Flex-O-Seal has a special peel off adhesive on the back side. Though very tough, our Flex-O-Seal is soft and suited to all types of flanges, covers and narrow cavities. Due to its soft and flexible structure this rope gasket is an ideal seal under pressure, without significant cold flow even on irregular, badly damaged or corroded flange surfaces for all types of materials i.e. enamel, glass, rough and special shaped sealing surface. Once bolted this gasket rarely needs to be re-torqued.

Champion Flex-O-Seal is easy to install and is able to fill in severe surface irregularities. The flexible applications of this product allows reduction of inventory of ready made gaskets, thereby the term Universal Joint Gasket.

Installation

- At the time of installation, the sealing surface must be clean, free from grease and dry to enable the gasket to stick properly.
- The width of the joint gasket is to be determined by the nominal diameter or type of flange.
- Selection of a tentative size of joint gasket would be approx, 1/3rd flange contact width inside the bolt hole; example: 7 mm gasket joint to suit a 20mm flange width.
- Remove the protective foil from the adhesive joint gasket to allow for fitting.
- Stick the gasket about 2mm away from the bolt hole and press lightly.
- Do not butt the ends, instead overlap them in front of a bolt.
- Tighten the lubricated bolts in opposite pairs. Lap joint deforms perfectly to give a reliable seal.
- On irregular or damaged flanged surfaces, it is possible to build up with short length of Flex-O-Seal.

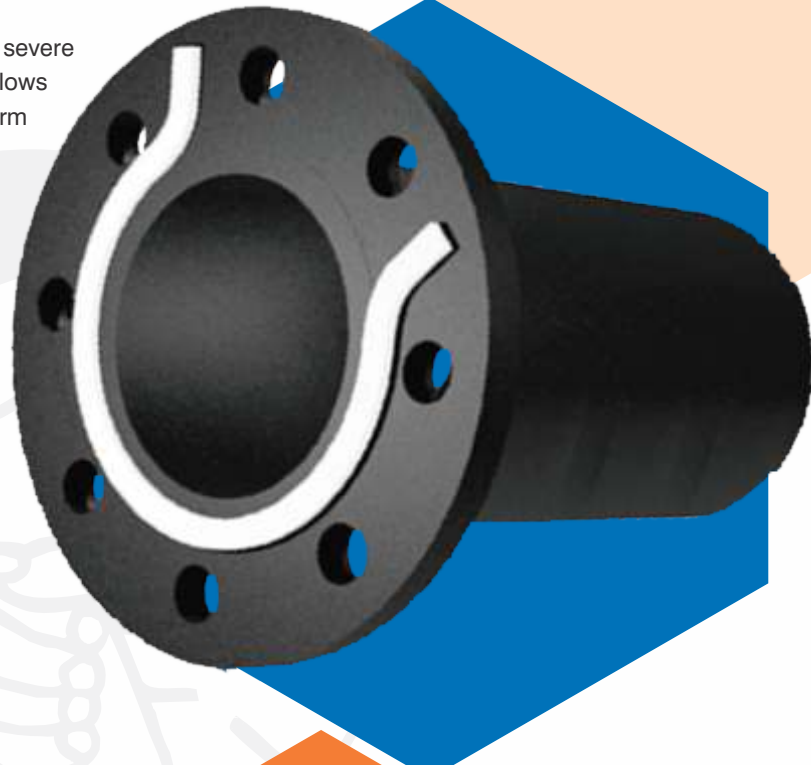

Physical Properties

1. Density - $> 0.6 \text{ g/cm}^3$
2. Temperature - 268°C to $+ 288^\circ\text{C}$
3. Chemical Resistance - pH 0 to 14 (except molten alkali metals and elemental fluorine)
4. Pressure $< 20 \text{ MPa}$
5. Compressibility - 55 TO 80%

Style	Width (mm)	Sealing (mm)	Thickness (mm)
CUJG-W10-T3.0	10	17-25	3
CUJG-W14-T3.0/5.0	14	25-40	3 & 5
CUJG-W17-T6.0	17	40-50	6
CUJG-W20-T5.0/7.0	20	50-65	5&7
CUJG-W25-T5.0/7.0/10.0	25	65-80	5,7&10
CUJG-W40-T5.0	40	80-100	5
CUJG-W50-T5.0	50	100+	5

Disclaimer: Information given in this datasheet is based on general experience and given in good faith. As the company's products are used for a multiplicity of purposes without control over the method of installation or selection or use with other equipment, the company excludes all conditions, liabilities or warranties, expressed or implied by statute or otherwise, as to their products and or their fitness for any purpose. Any technical suggestions is shared in good faith without any liability whatsoever.

CHAMPION SEALS INDIA PVT. LTD.

Champion Building, First Floor, 15/18 Parsee Panchayat Road, Andheri (East), Mumbai - 400 069. Maharashtra - INDIA.

Tel.: +91-2228367311-15 | Customer Care: +91-9820171162

Email: info@championseals.in | Website: www.championseals.in

